


A 90° elbow connection between 2 tubes, typical use is on straight and level guardrail to connect the vertical post to the top rail. It is normally used in conjunction with KC101 when building a two rail guardrail system or creating a 90° tube bend.

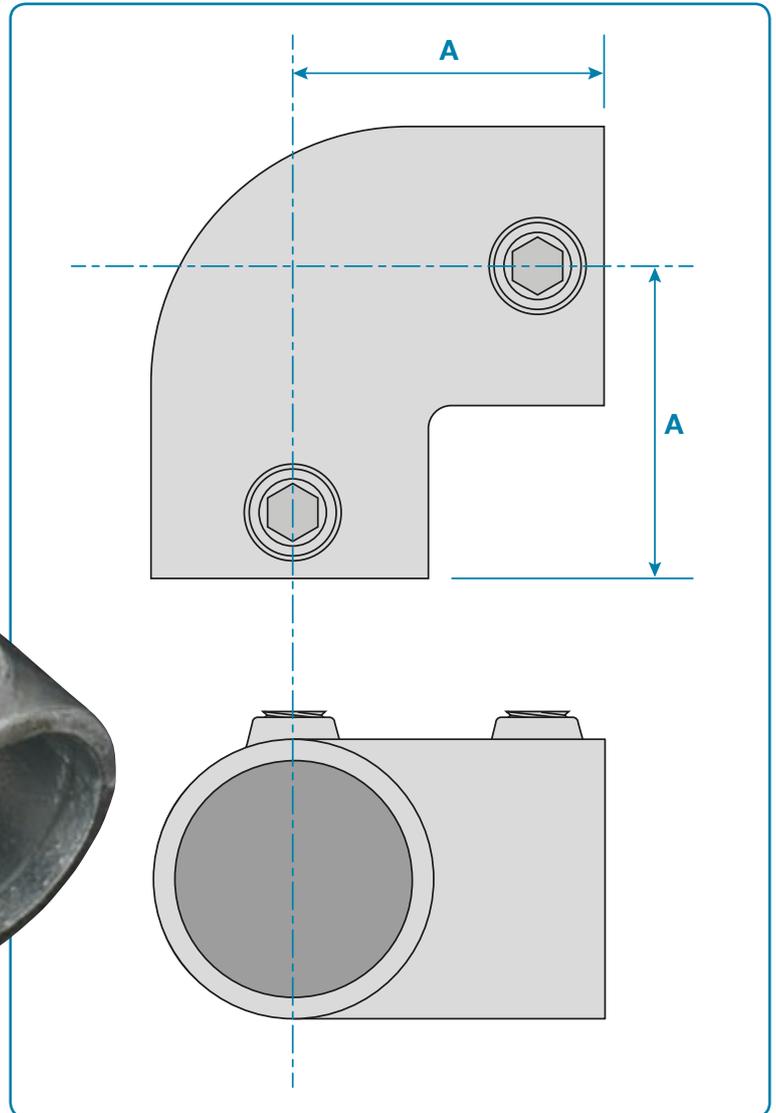

| Code          | A    | Weight |
|---------------|------|--------|
| <b>KC125A</b> | 42mm | 0.26kg |
| <b>KC125B</b> | 48mm | 0.39kg |
| <b>KC125C</b> | 60mm | 0.62kg |
| <b>KC125D</b> | 68mm | 0.81kg |
| <b>KC125E</b> | 84mm | 1.28kg |