


EAGLE

UNDERGROUND ACTUATOR
230V AND 24V VERSIONS

Life
made
easy

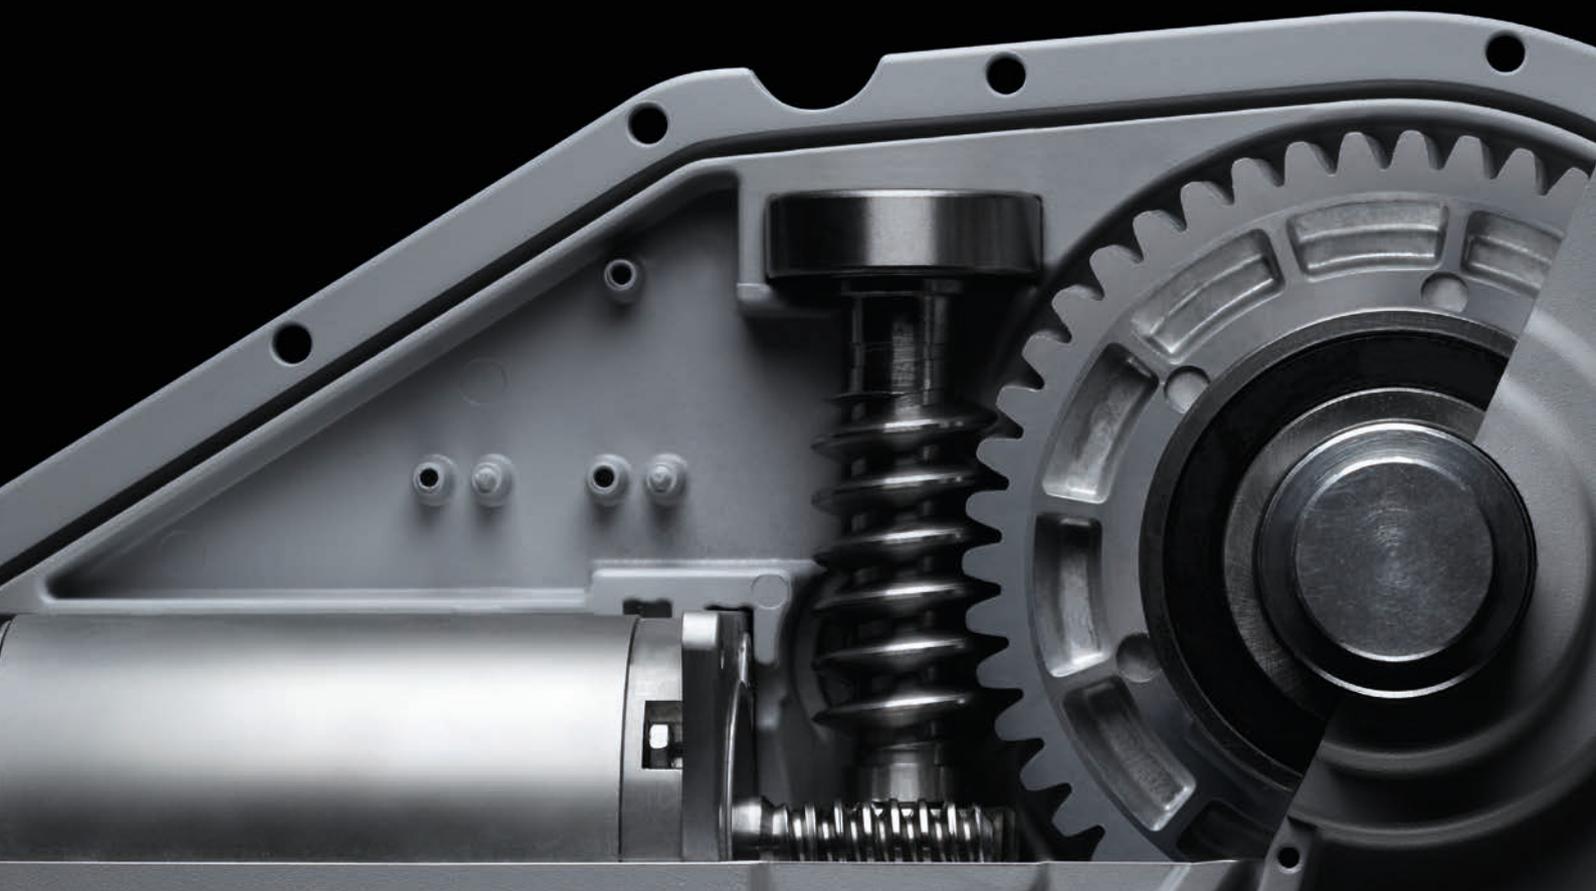

EAGLE

Technical features

Available with Encoder versions

Monobloc steel levers obtained by casting, without welding

Fully protected internal operator in monoblock die-cast aluminium crankcase
Double protection cover with internal and external gasket

Positions dedicated to the fixing of electronic limit switches AC-190

10 m (encoder versions only)

Steel screws with seal for actuator hermetic sealing

AISI 316L stainless steel lid



Heat galvanised foundation box for greater corrosion resistance

Minimum guaranteed thickness of 60 micron as required by the UNI EN ISO 14661 relevant legislation

TECHNICAL CHARACTERISTICS

	24V	230V
Operating power supply	24 VDC	230 VAC
Power consumption	150 W	280 W
Max. absorption	6,5 A	1,2 A
Torque	220 Nm	300 Nm
Duty cycle	Intensive use	50%
Protection degree (IP)	IP67	IP67
Insulation class	2	1 (earthing)
Working temperature	-20°C / +50°C	-20°C / +50°C
Speed	0,1 Rad/s	0,08 Rad/s
Weight	11,3 Kg	11,6 Kg

DIMENSIONS (mm)

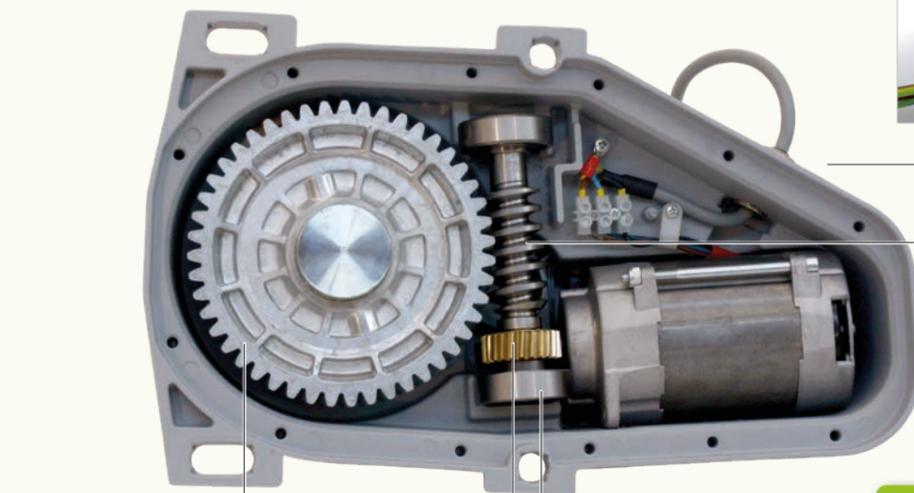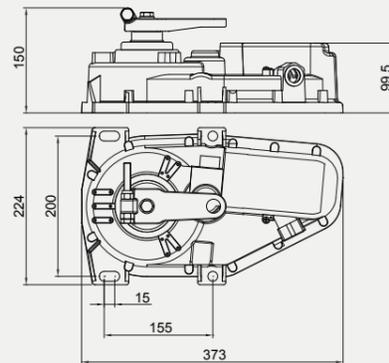

Die-cast high elastic strength zamak cogwheel

Reduction shaft with bearings and gears in steel and bronze

-40°C / +40°C arctic bearings




Steel cable gland fully resin-coated internally and neoprene cable

Gears lubrication with arctic grease



Every single product is duly tested at the end of each assembly line

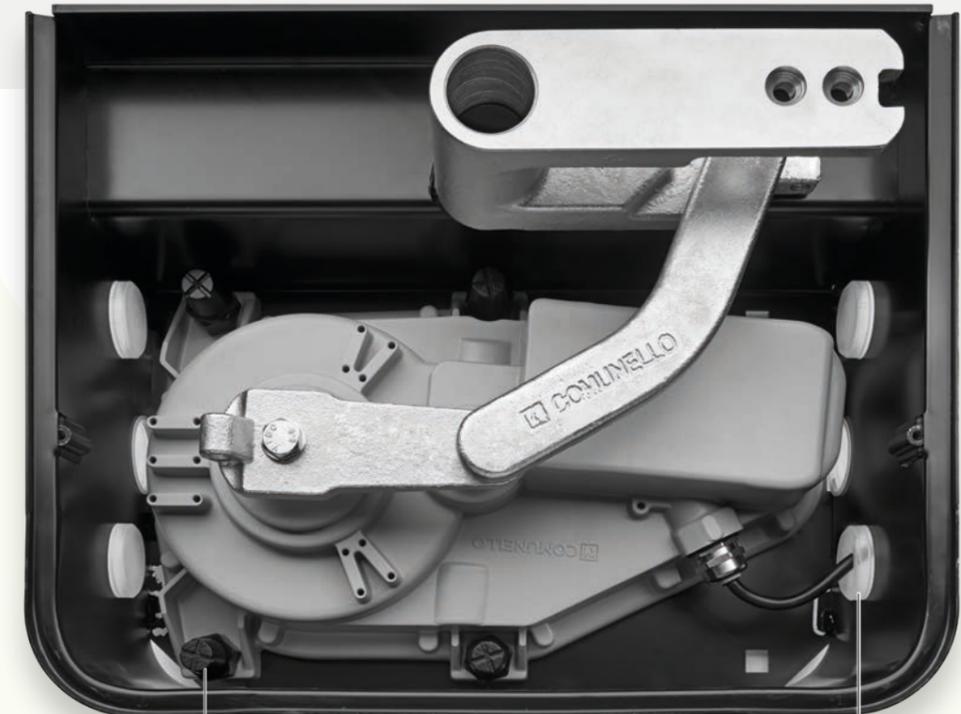

Cover fixing screws

Box closure caps for cable and drainage tubes passage



OFFICIAL DEALER:

 **COMUNELLO**
AUTOMATION

AUTOMATION FOR GATES, DOORS AND BARRIERS

FRATELLI COMUNELLO S.P.A.

HEADQUARTERS

Via Zarpellon, 33

36027 San Giuseppe di Cassola, Vicenza, Italy

Tel. +39 0424 585111 Fax +39 0424 533417

info@comunello.it www.comunello.com

REGISTERED OFFICE

Via Cassola,64 - C.P.79

36027 Rosà, Vicenza, Italy

Tel. +39 0424 585111 Fax +39 0424 533417

info@comunello.it www.comunello.com