
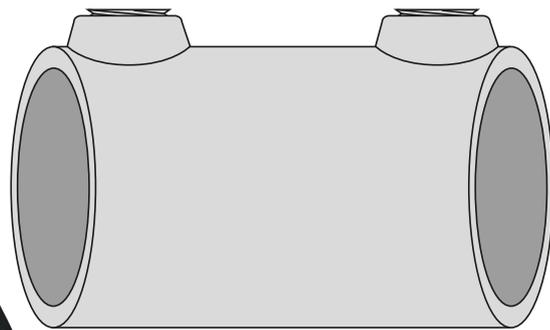


A variable elbow connector 15° - 60°, it is used to connect two rails to avoid the need to bend the tube and it can also be used at the bottom of a slope or stair guardrail to join the top rail to the vertical.

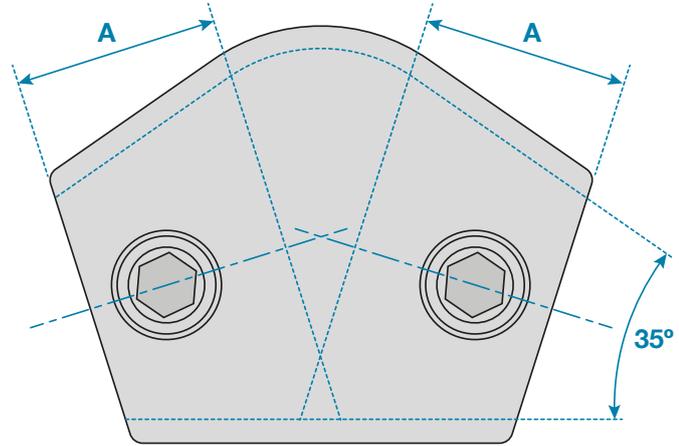

Code	A	Weight
KC124B	31mm	0.39kg
KC124C	39mm	0.62kg
KC124D	44mm	0.82kg