
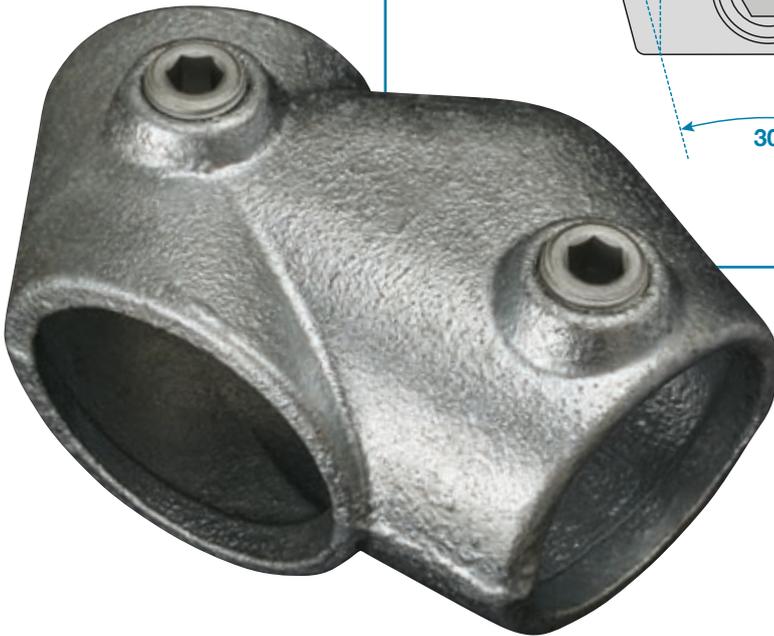


An adjustable tee between 30° and 60°, it is used to connect the vertical to the top rail on a sloping or staircase systems. It does not allow tubes to be joined inside the fitting. It is normally used in conjunction with KC130 on 2 or 3 rail systems.

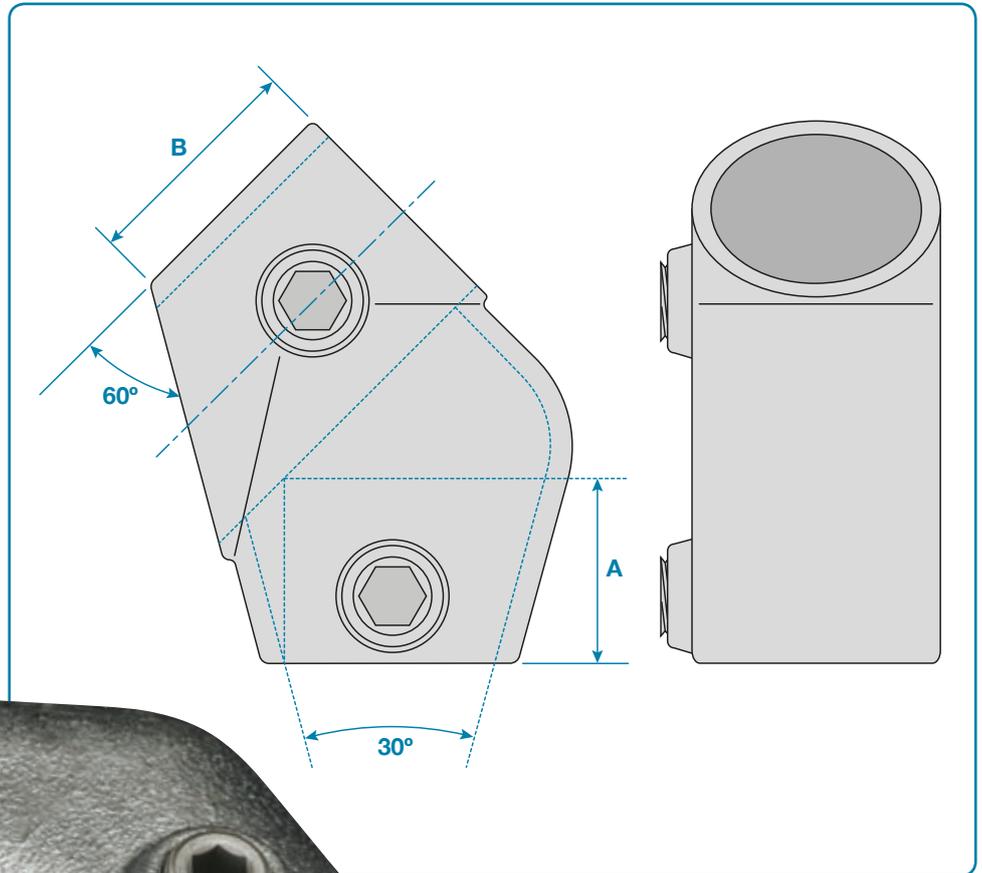

Code	A	B	Weight
KC129B	66mm	32mm	0.39kg
KC129C	78mm	37mm	0.62kg
KC129D	86mm	40mm	0.82kg