



SCAN FOR
MORE INFO



LAKQU2



Let's make it better together

Surface mounted
gate lock

500 K CYCLES

STAINLESS MATERIAL


PREMIUM QUALITY



Find out more: locinox.com | help@locinox.com



SCAN FOR
MORE INFO

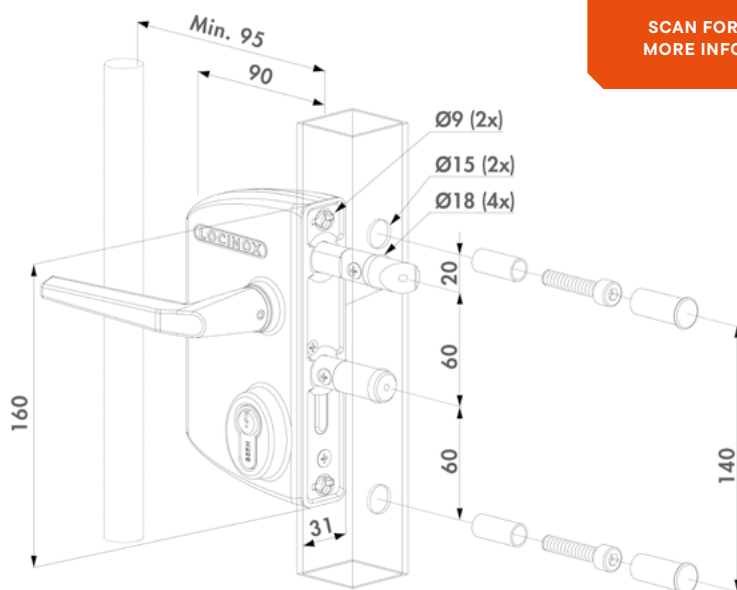

LOCINOX®

LAKQU2

Surface mounted gate lock

High quality gate lock with aluminium housing and stainless steel mechanism. We advise this lock as a standard for all your industrial gates. The 20 mm continuous adjustability of the bolts allows a perfect latching / locking of the mechanism. A solid stainless steel deadbolt with a 23 mm throw guarantees a secure locking. Standard supplied with anodized aluminium handle pair. For a fast and highly precise installation, we recommend using the Drill-Fix drilling jig.



Specifications

- ISO 9227 KTL / E-coated lock box withstands 1000 hours of salt spray test
- Easy left or right changing of the self-latching daybolt
- 23 mm throw of the dead bolt, in 1 turn of the key
- Key-operated self-latching bolt
- 4-hole fixing with two hexagon socket head screws
- 60 mm center distance of the bolts
- Continuous adjustment of the daybolt up to 20 mm without dismounting the lock box
- Stainless steel mechanism